


VOLVO PENTA INBOARD DIESEL

D13-900/1000




Emission compliance: IMO Tier III and US EPA Tier 3

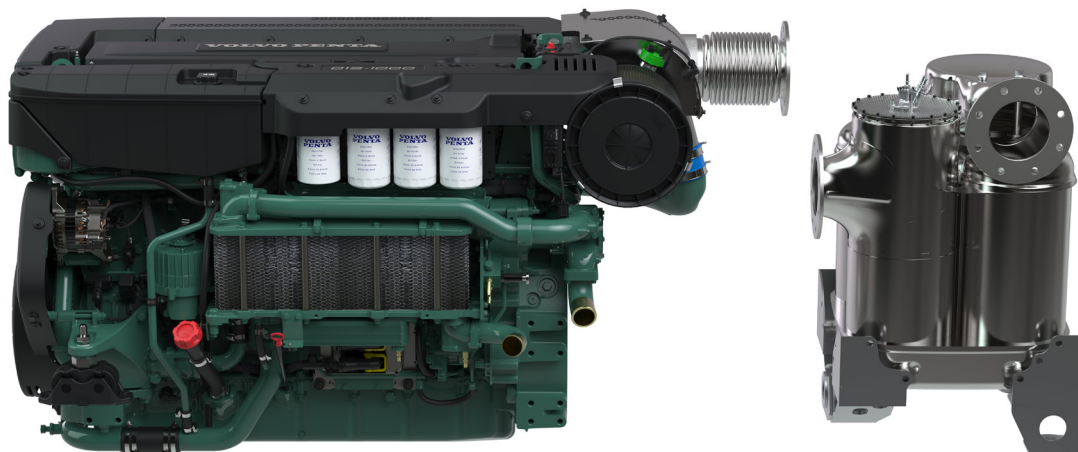

Technical Data

Engine designation	D13-900	D13-1000
Configuration	in-line 6	in-line 6
Bore/stroke, mm (in.)	131/158 (5.16/6.22)	131/158 (5.16/6.22)
Displacement, l (in ³)	12.78 (779.7)	12.78 (779.7)
Method of operation	4-stroke, direct-injected, turbocharged diesel engine with charge air cooler	
Compression ratio	17.1:1	17.1:1
Crankshaft power, kW (hp) @ rated speed	662 (900) @2300 rpm	735 (1000) @2400 rpm
Max. torque, Nm (lbf.ft) @1500 rpm	3304 (2437) @1500 rpm	3528 (2602) @1800 rpm
Dry weight bobtail, kg (lb)	1635 (3605)	1635 (3605)
Voltage	24V	24V
Emission compliance	IMO Tier III, US EPA Tier 3	IMO Tier III, US EPA Tier 3
Rating	R4	R5
Recommended fuel to conform to	ASTM-D975 1-D & 2-D, EN 590 or JIS KK 2204. Max 1000PPM.	
Flywheel housing/SAE size	14"/SAE1	14"/SAE1

Technical data according to ISO 8665. With fuel having an LHV of 42700 kJ/kg and density of 840 g/liter at 15 °C (60 °F). Merchant fuel may differ from this specification which will influence engine power output and fuel consumption. *Ratings R2 & R3, see explanation in Volvo Penta's Product Guide.

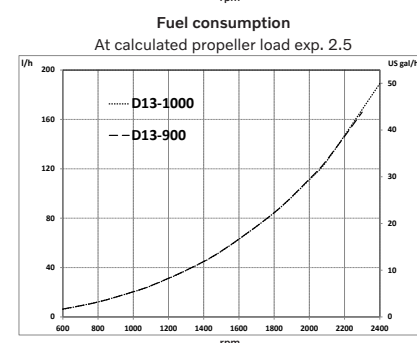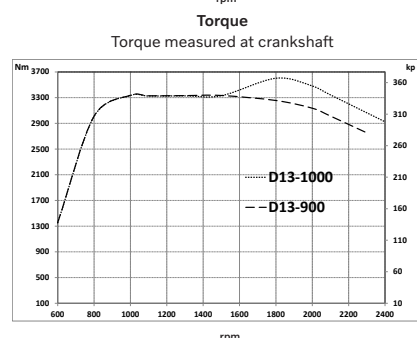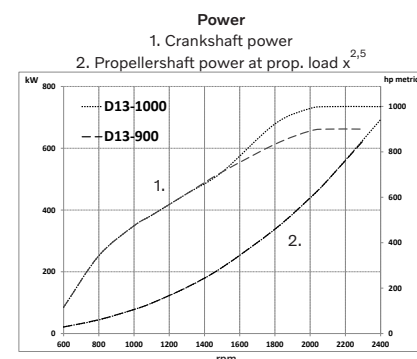

D13-900/1000

Emission compliance: IMO Tier III and US EPA Tier 3

Technical description

Engine and block

- Cylinder block made of cast iron
- One-piece cast-iron cylinder head
- Ladder frame fitted to engine block
- Replaceable wet cylinder liners and valve seats/guides
- Drop forged crankshaft with induction hardened bearing surfaces and fillets with seven main bearings
- Four-valve-per-cylinder layout with overhead camshaft and center position of unit injectors
- Each cylinder features cross-flow inlet and exhaust ducts
- Monotherm steel pistons
- Rear-end transmission

Engine mounting

- Flexible engine mounting

Lubrication system

- Integrated oil cooler in cylinder block
- Rear positioned twin full flow oil filter of spin-on type and by-pass filter

Fuel system

- Electronic high pressure unit injectors
- Gear-driven fuel pump and injection timing

- Electronically controlled central processing system (EMS – Engine Management System)
- Single fine fuel filter of spin-on type

Air inlet and exhaust system

- Twin entry turbo technology with freshwater-cooled charge air cooler
- Air filter with replaceable inserts
- Wet exhaust elbow (option)
- Loss of sea water alarm

Cooling system

- Seawater-cooled plate heat exchanger
- Coolant system prepared for hot water outlet
- Easily accessible seawater pump in rear end of flywheel housing

Electrical system

- 24V/110A plus an optional extra 12V/115A alternator

Gear box

- ZF500-1A-E and ZF500-1IV-E, with low speed as option, electronically shifted
- ZF-400A and ZF-400IV, with low speed as standard, electronically shifted
- Connection kits for Twin disc available



Electronic Vessel Control (EVC)



- Fully integrates the engines, electronics and the unique set of EVC features; Joystick Docking (available for twin engine installations), Glass Cockpit and more

Exhaust aftertreatment system

- SCR (Selective Catalytic Reduction)
- Aqueous UREA solution 32% or 40%
- Complete system – developed, certified, and serviced by one company
- Fully integrated capabilities
- SCR unit reduces noise by up to 35 dBA
- Wide range of installation options available

Dimensions D13-1000 with ZF400A

Not for installation, mm [in.]

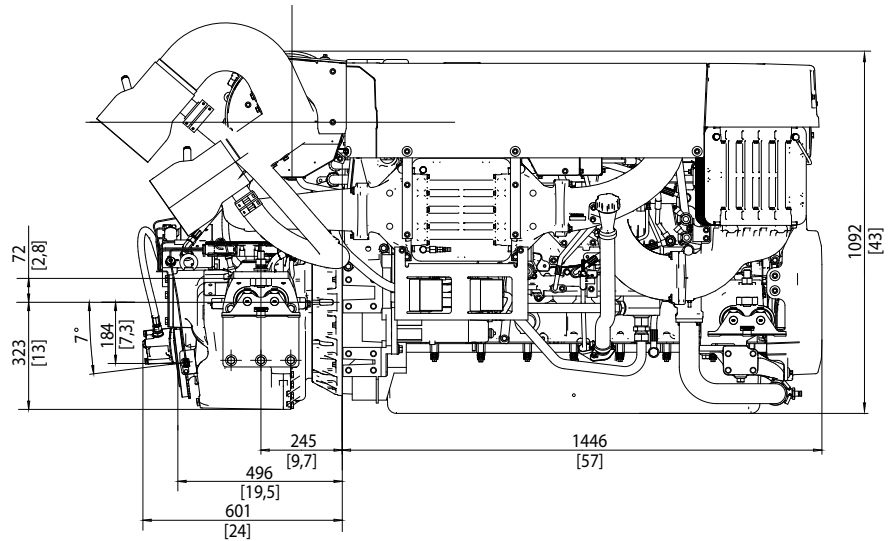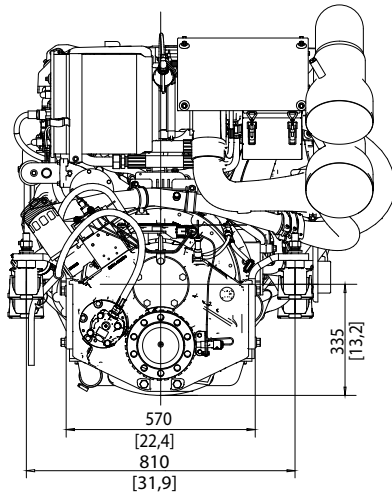

Not all models, standard equipment and accessories are available in all countries. All specifications are subject to change without notice. The engine illustrated may not be entirely identical to production standard engines.

Contact your local Volvo Penta dealer
for more information regarding Volvo
Penta engines and optional equipment/
accessories or visit
www.volvopenta.com



AB Volvo Penta
SE-405 08 Göteborg, Sweden
www.volvopenta.com